


Tablou TES 4(farmacie)

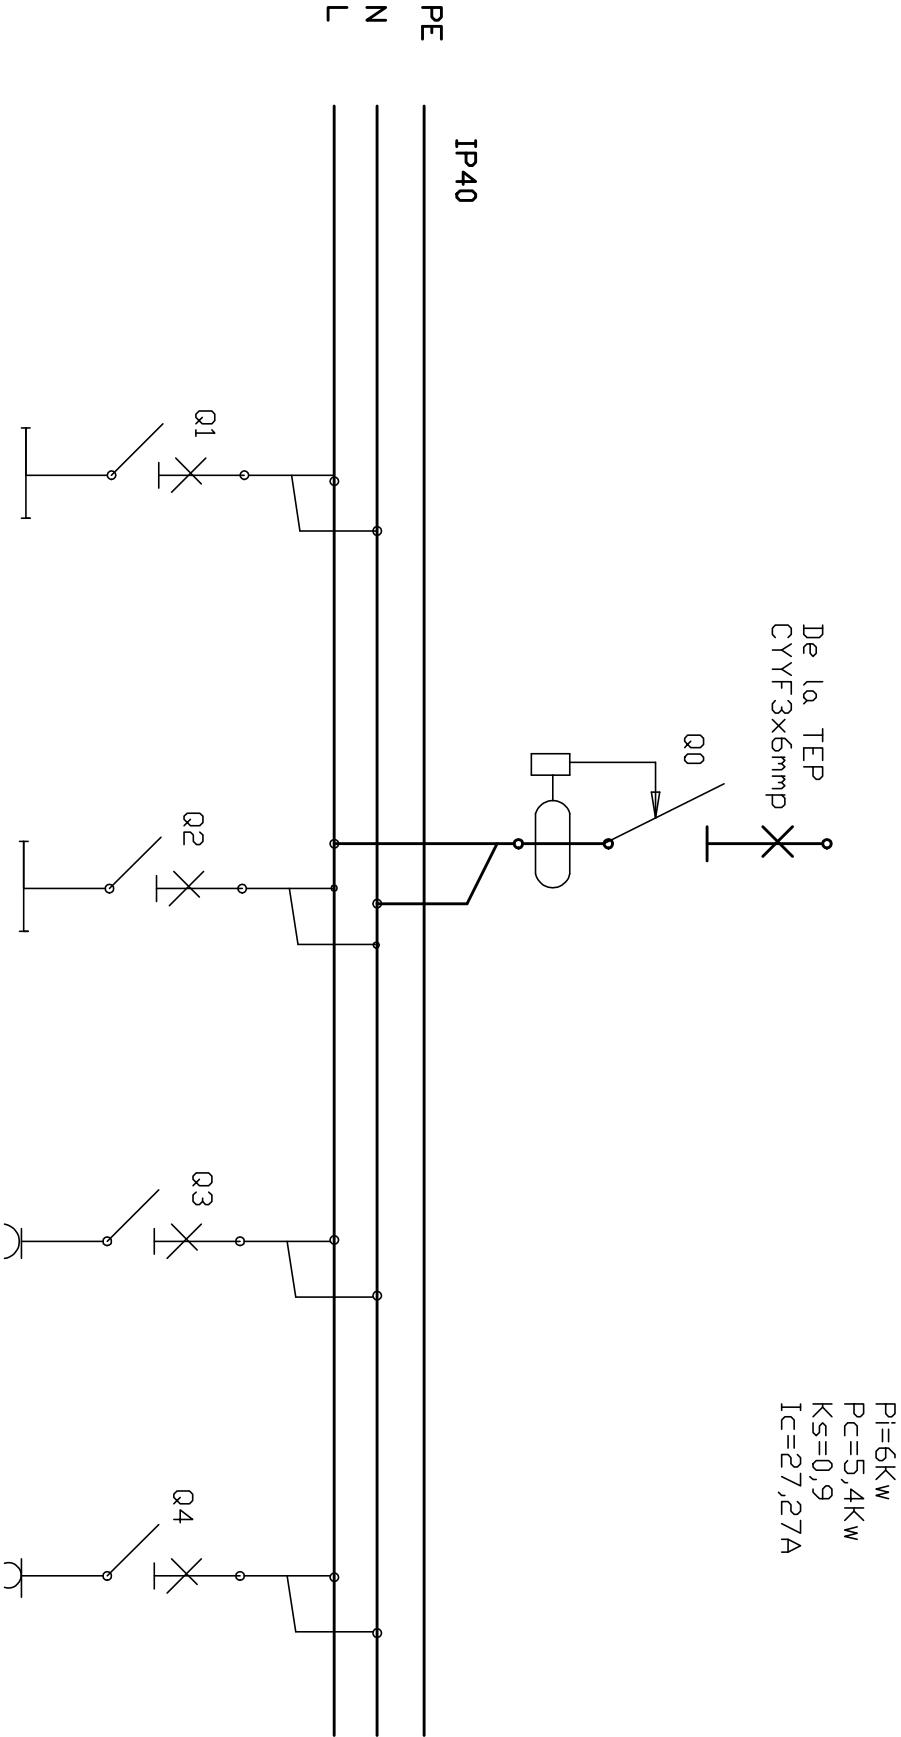

De la TEP
CYVF3x6mm

PI=6Kw
PC=5,4Kw
KS=0,9
Ic=27,27A

Denumire circuit	CL1	CL2	CP1	CP2 boiler	rez.	rez.
P[Kw]	1	1	2	2		
Ic[A]	4,54	4,54	9,09	9,09		
Sec tiune f Y[mmp]	2x1,5	2x1,5	3x2,5	3x2,5		
Incapere deservita	farmacie	farmacie	farmacie	farmacie		
Protectie	1A1P+N/10A	1A1P+N/10A	1A1P+N/16A	1A1P+N/16A		

SPECIFICATIE TEHNICA TABLOU TES

Q0 Intreruptor automat DPN_a 1P+N+PE, In=32A, cu protectie la suprasarcina si scurtcircuit, curba C, I_{sc}=10kA, plus bloc diferential, VigiC60, Id=30mA

Q1, Q2 Intreruptor automat DPN 1P+N, In=10A, curba C cu protectie la suprasarcina si scurtcircuit

Q3, Q4 idem In=16A

VERIFICATOR		REFERAT/EXPERTIZA		NR/DATA	
EXPERT					
Arh.DOMAHIDI ILDIKO		LUCRAREA		MODERNIZARE, REAMENAJARE	
BIROU INDIVIDUAL DE ARHITECTURA NR.37		LOCALITATEA		CLADIRE	
SFINTU GHEORGHE, JUDEA		BENEFICIAR		PENTRU CABINETE MEDICALE, FARMACIE SI AMENAJARE CURTE	
SEF PROIECT		SCARA		TITLUL PLANSEI	
PROIECTAT		1:100		SCHEMA MONTILARA	
				NR. PLANSA	
				E-02/4	