


Tablou TES2(cabinet stomatologic)

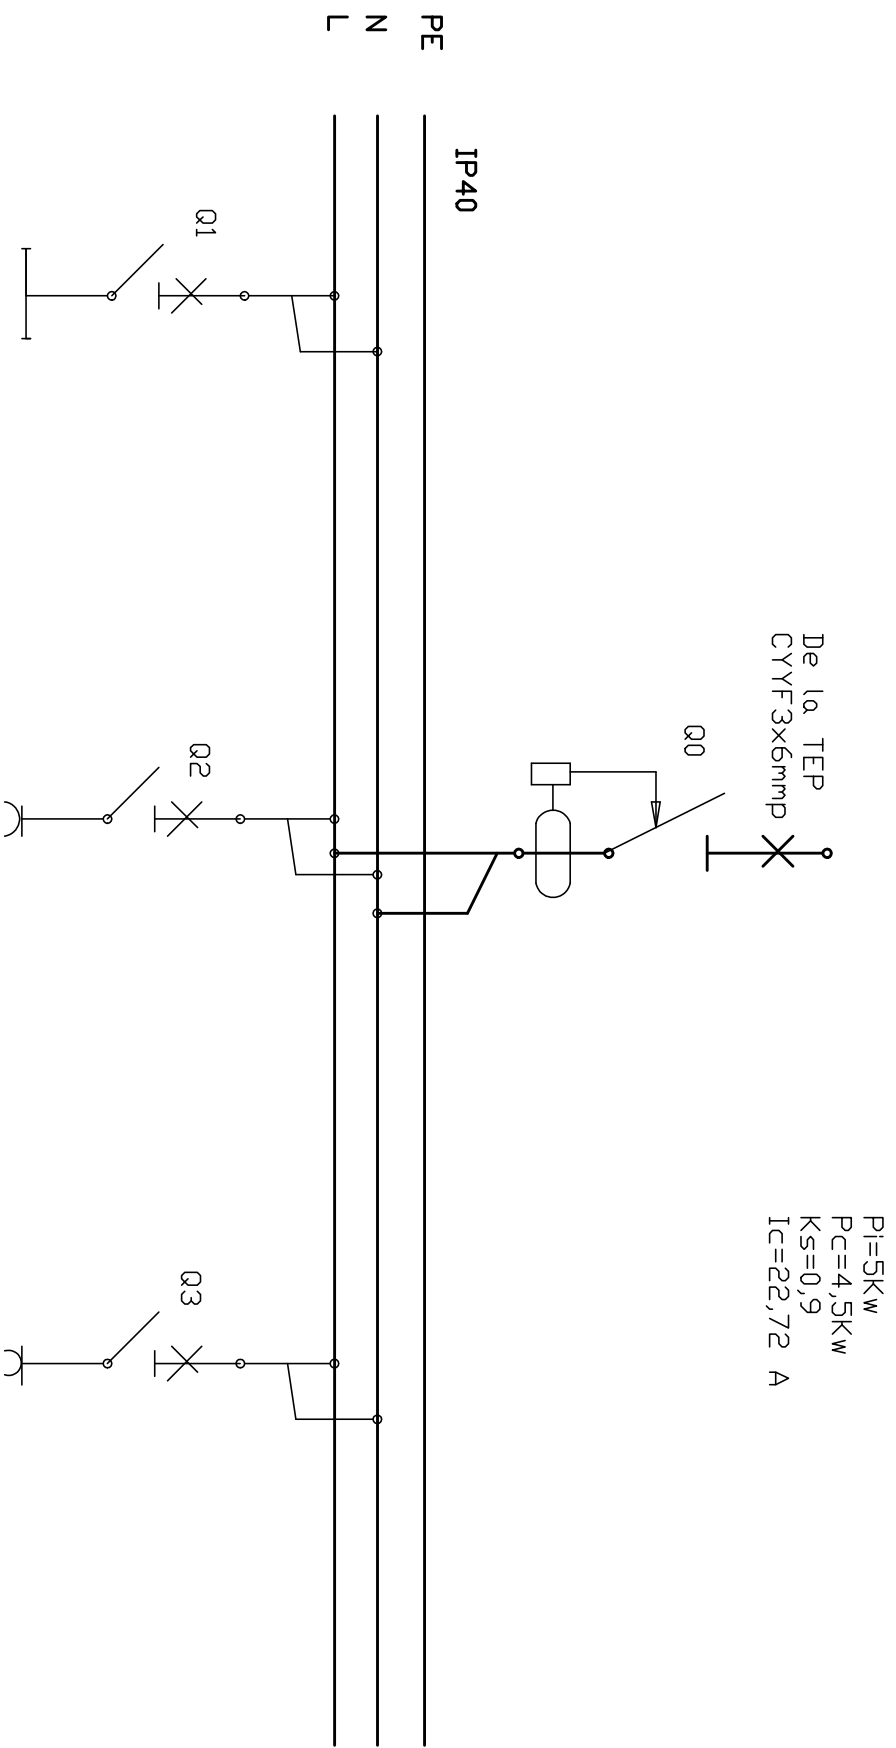

Denumire circuit	CL1	CP1	CP <sup>2</sup> (unit. dentara)	rez.	rez.	rez.
Pi[Kw]	1	2	2			
Ic[A]	4,54	9,09	9,09			
SectiuneY[mmp]	2x1,5	3x2,5	3x2,5			
Incapere deservita	cab. stomat.	cab. stomat.	cab. stomat.			
Protectie	1A1P+N/10A	1A1P+N/16A	1A1P+N/16A			

## SPECIFICATIE TEHNICA TABLOU TEST

00 Interrupator automat DPNa 1P+N+PE,In=32A,cu protectie la suprasarcina s  
scutcircuit,curba c,Isc=10kA,plus bloc diferential,Vigici60,Id=30mA

Q1	Interrupator	automa.tDPN	1P+N,In=10A,curba	C	cu	protectie	la	suprasarcina
Q2...Qn	IDEM	In=16A						

VERIFICATOR EXPERT			REFERAT / EXPERTIZA		NR./DATA	
	Arh.DDOMAHIDI ILDIKO  BIRDU INDIVIDUAL DE ARHITECTURA NR.37  SFINTU GHEORGHE,JUD. COVASNA		LUCRAREA	MODERNIZARE,REAMENAJARE CLADIRE PENTRU CABINETE MEDICALE, FARMACIE SI AMENAJARE CURTE	85/2010  FAZA  DT/DE	PROIECT NR.
SUF PROIECT	arh.DDOMAHIDI ILDIKO		SCARA	TITLUL PLANSETI	NRP.LANSA	
PROIECTAT	sing.ANICA MEGIESAN		1:100	SCHEMA MONOFILARA	E-02/2	