


Tablou TS1 (cab. med. 2)

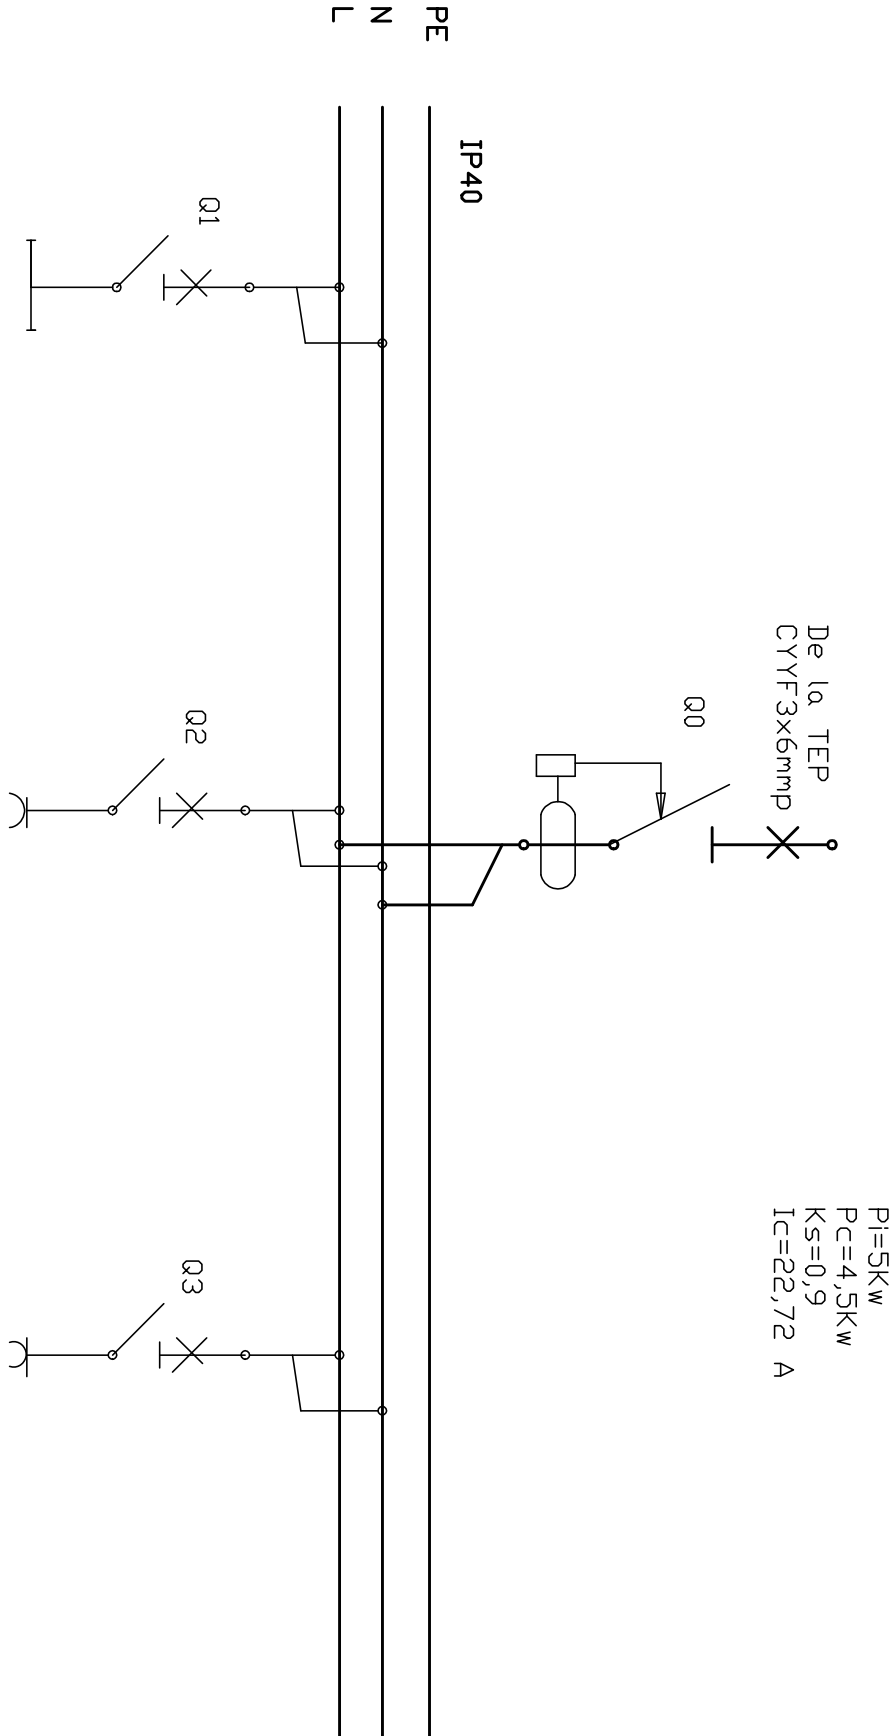

Denumire circuit	CL1	CP1	CP2	rez.	rez.	rez.
P[Kw]	1	2	2			
Ic[A]	4,54	9,09	9,09			
Sectionef Y[mm²]	2x1,5	3x2,5	3x2,5			
Incapere deservita	Cabinet medical 2	Cabinet medical 2	Cabinet medical 2			
Protectie	1A1P+N/10A	1A1P+N/16A	1A1P+N/16A			

SPECIFICATIE TEHNICA TABLOU TES

- Q0 Intreruptor automat DPNa 1P+N+PE,In=32A,cu protectie la suprasarcina si scurtcircuit,curba c,Isc=10kA,plus bloc diferential,Vigic60,Id=30mA
- Q1 Intreruptor automatDPN 1P+N,In=10A,curba C cu protectie la suprasarcina si scurtcircuit
- Q2...Qn IDEM In=16A

VERIFICATOR		REFERAT/EXPERTIZA		NR/DATA	
EXPERT					
		LUCRAREA		MODERNIZARE,REAMENAJARE	
		BIROU INDIVIDUAL DE ARHITECTURA NR.37 SFINTU GHEORGHE,JUD. COVASNA		CLADIRE PENTRU CABINETE MEDICALE, FARMACIE SI AMENAJARE CURTE MUNICIPUL SFINTU GHEORGHE	
SEF PROIECT		Arh.DOMAHIDI ILDIK		SCARA 1:100	
PROIECTAT		sing.ANICA MEGIESAN		TITLUL PLANSEI SCHEMA MONOFILARA	
				NR.PLANSA E-02/1	