


TRONSON b-c
QI=26,39 Nmch/h
Ø = 2"
L= 10,80 m

TRONSON c-d
QI=26,39 Nmch/h
Ø = 1 1/4"
L= 8,75 m

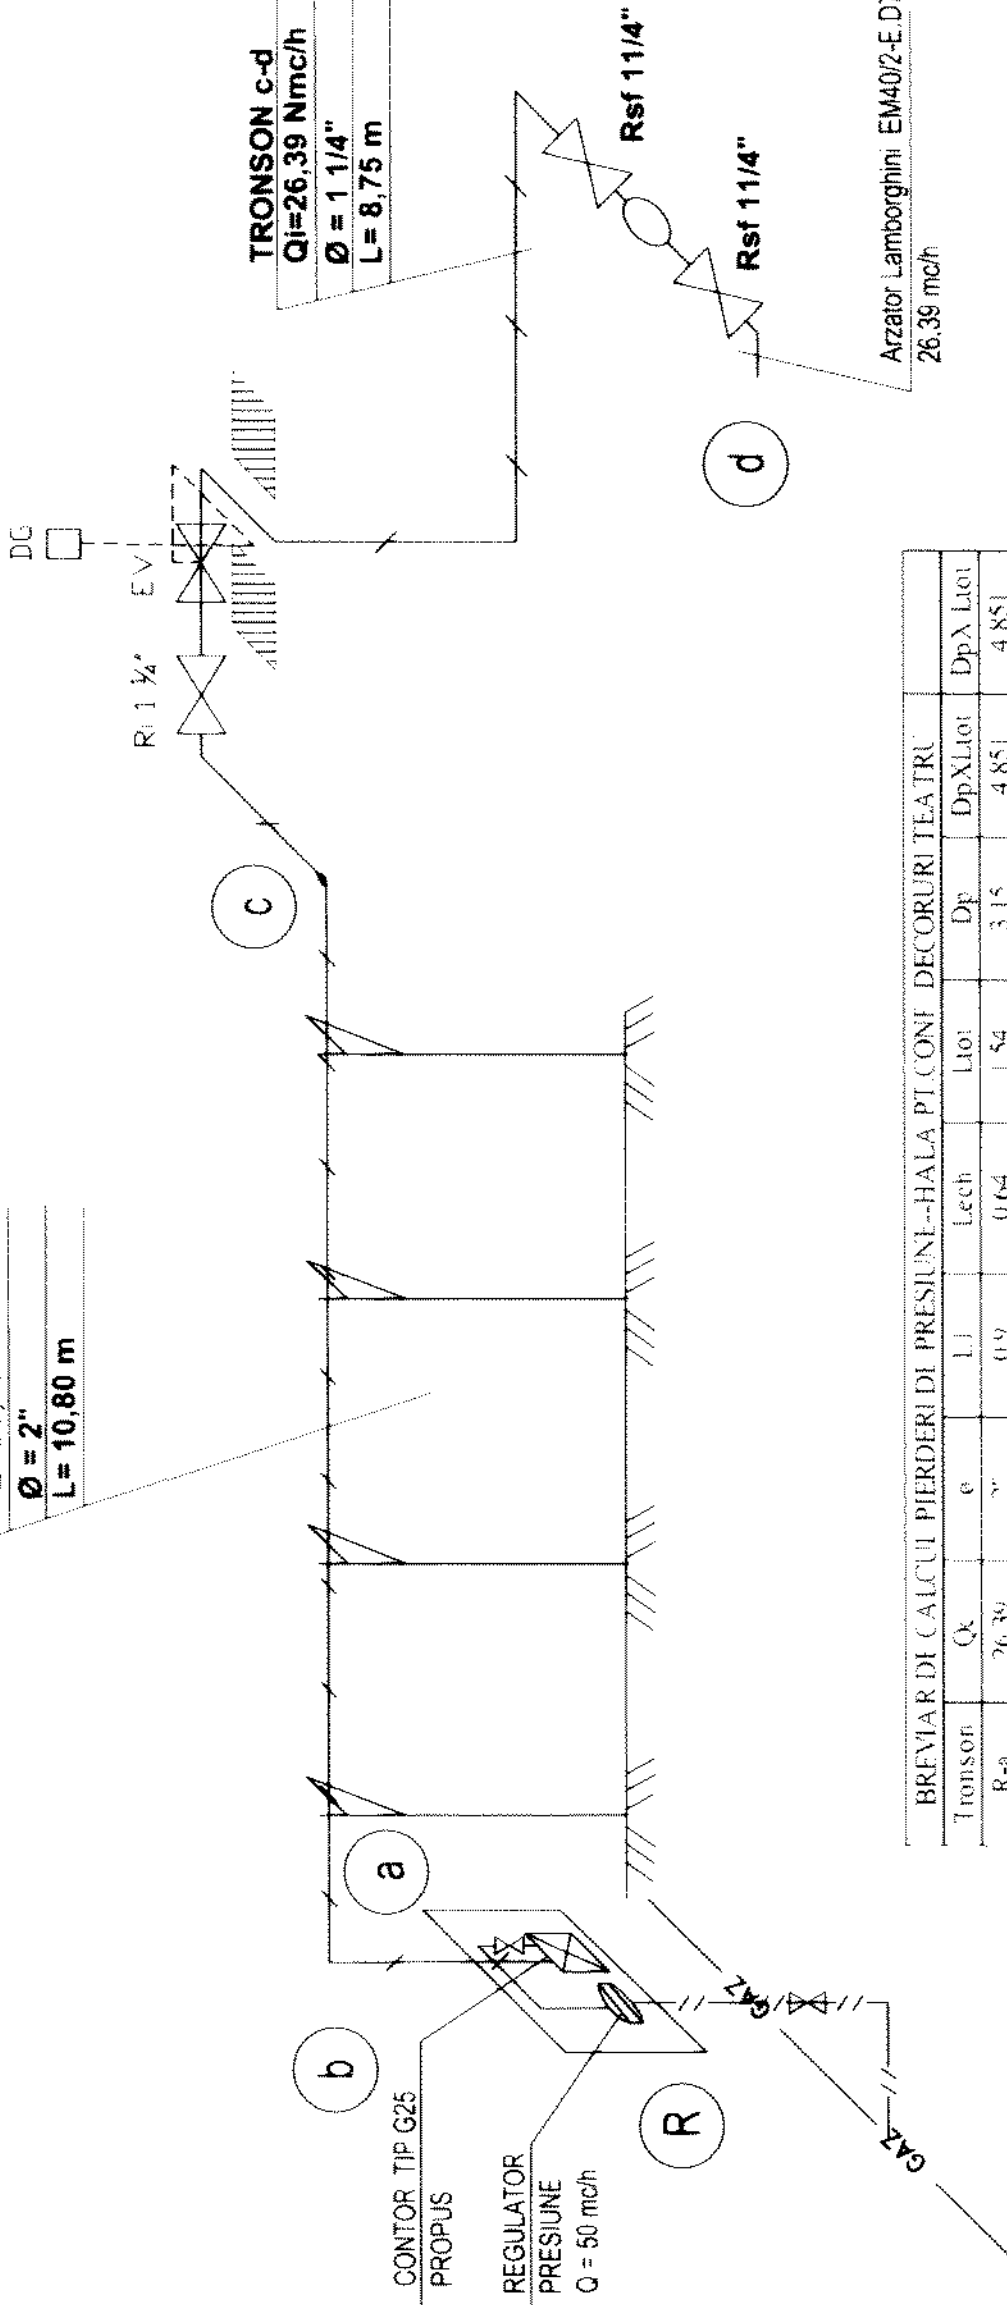

BREVIAIR DE CALCUL PIERDERII DE PRESIUNE--HALA PT. CONE. DECORURI TEATRU									
Tronson	Qk	e	L1	Lech	Ltot	Dp	DpX Ltot	DpX Ltot	
R-a	26,39	2"	0,9	0,64	1,54	3,15	4,851	4,851	
a-b	CONTOUR								
b-c	26,39	2"	10,8	1,98	12,78	3,15	40,257	245,108	
c-d	26,39	1 1/4"	8,75	0,56	9,31	25,1	233,681	478,789	

LEGENDA

- GAZ
- Bransament gaze naturale presiune redusa propus
- PRM Post de reglare - masura cu regulator QI= 50 mch/h existent si contor G25 propus
- Instalatie gaze naturale proiectata
- DG - Detector gaze naturale
- EV - Electrovana gaze naturale
- Cablu electric 3x1,5 mm pentru legatura intre DG si EV

Arzator Lamborghini EM 40/2-E.D7 -cu doua trepte de functionare cu urmatoarele dotari de serie:

- rampa de gaz cu filtru, presostat de minim, gaz, stabilizator de presiune, electroventil de siguranta si electroventil de minim, diuza combustibil
- presostat de minim aer, clapet de aer actionat electric.
- ventilator centrifugal de inalt randament, grila de protectie pentru admisie aer.
- bloc de comanda, control si siguranta cu autodiagnoza, detectarea flacarilor prin ionizare



VERIFICATOR/EXPERT	NUME	SEMNTURA	CERINTA	REFERAT / EXPERTIZA NR./DATA
	Sedii social S.C. Conextrust S.A., Romania, Bacau str. I.S. Sturza, nr.78. Cod 600269. Punct de lucru str. Toisto, nr.14. Tel 0234/576 702 Fax 0234/515831			Beneficiar:
	Nr RC J04/38 1991 Cod Fiscal R094773G Website www.conextrust.ro			MUNICIPIUL SFANTU GHEORGHE
	E-mail: conextrustbacau@yahoo.com			Amplasament:
				Str. CAMPUL FRUMOS, nr.FN. mun. SFANTU GHEORGHE, jud. COVASNA
SPECIFICATIE	NUME	SEMNTURA	SCARA	
SEF PROIECT	Ar AMARIE CONSTANTIN		%	
PROIECTAT	Ing. BERHECI IONICA			
DESENAT	Ing. BERHECI IONICA			
VERIFICAT	Sing. BULIGA MARIA			
SEF SERVICIU	Ing. MIRCEA COJOCARU			
PROIECTARE DIR. GENERAL	Ing. ADRIAN DOSPINESCU			
			DATA	
			2011	
				Faza SF
				PLANSĂ G2