



PROFILE TRANSVERSALE TIP

SCARA 1:50

Sectiunea A - A



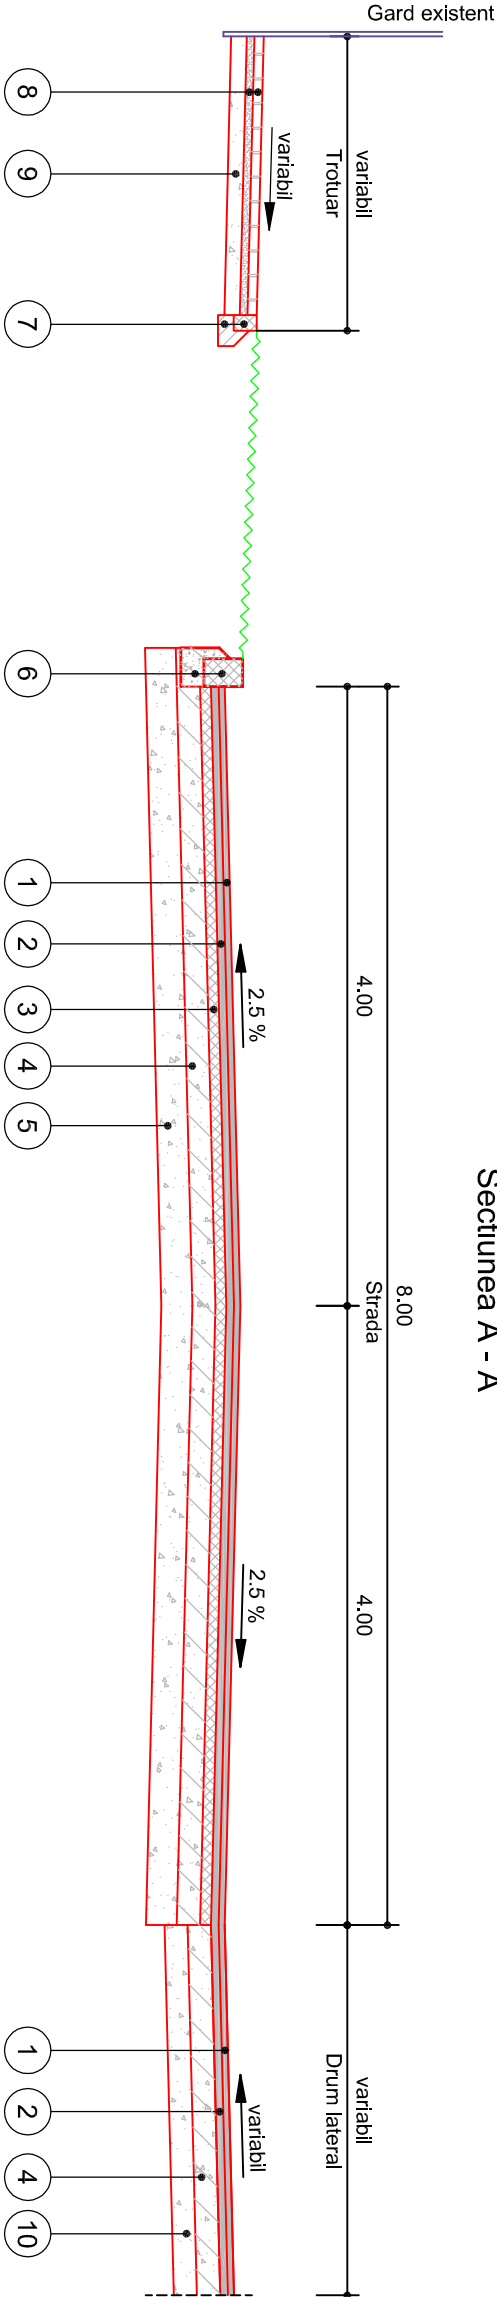

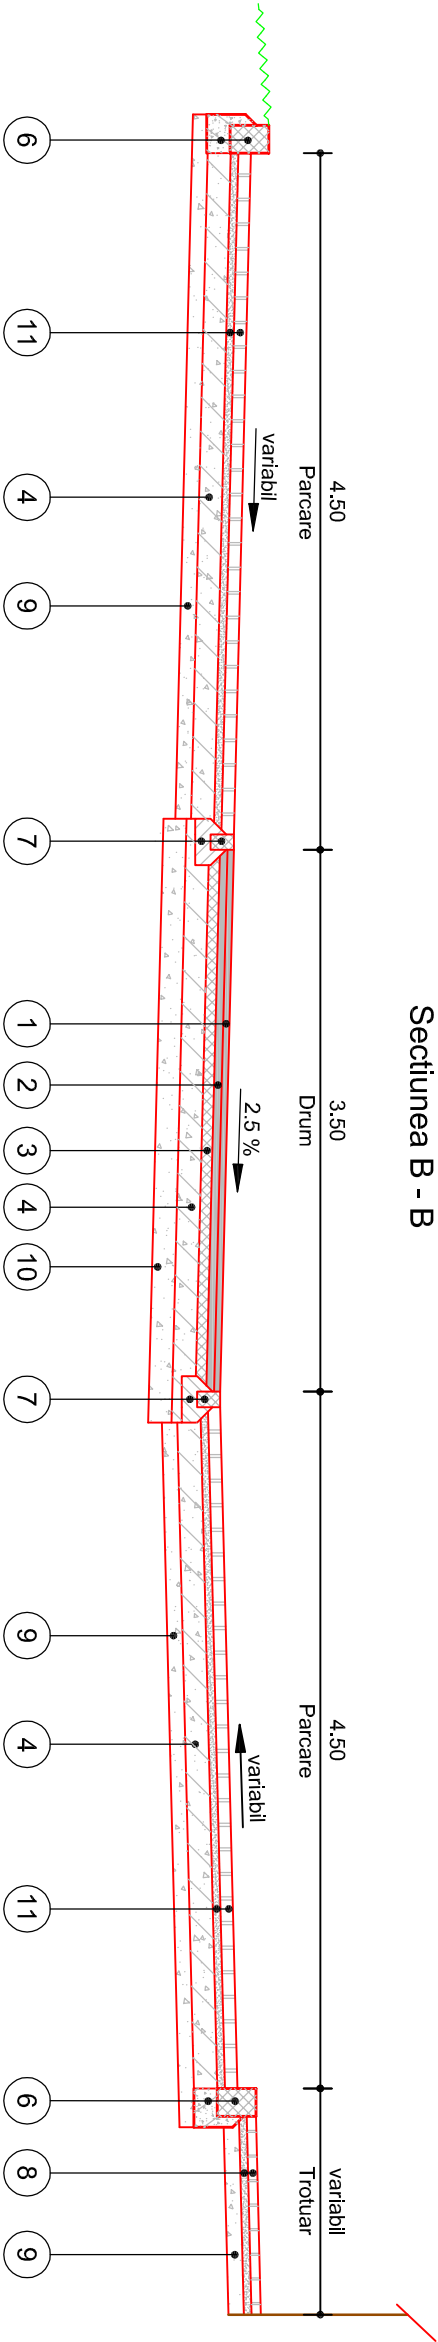Sectiunea B - B



LEGENDA

- 1. Imbracaminte din beton asfaltic BA 16 de 4 cm grosime
- 2. Binder de criblură BAD 25 de 5 cm grosime
- 3. Mixtura asfaltica AB1 de 5 cm grosime
- 4. Balast stabilizat cu ciment de 6% de 15 cm grosime
- 5. Strat de fundatie din balast de 20 cm grosime
- 6. Borduri prefabricate de 20x25 cm , asezat pe o fundatie de beton de 15x30 cm (C6/7.5)
- 7. Borduri prefabricate de 10x15 cm , asezat pe o fundatie de beton de 10x30 cm (C6/7.5)
- 8. Dale ornamentala de 6 cm grosime pe un substrat de nisip de 5 cm grosime
- 9. Strat de fundatie din balast de 10 cm grosime
- 10. Strat de fundatie din balast de 15 cm grosime
- 11. Dale ornamentala traforate de 8 cm grosime pe un substrat de nisip de 5 cm grosime

SOCIETATEA COMERCIALA			Beneficiar :		Nr. Pr. 1067
S.C. NIVO - IDEA S.r.l.			MUNICIPIUL SFANTU GHEORGHE		
MIERCUREA - CIUC					
J19/1152/2003					
Specificatie	Nume	Semnatura	SCARA 1:50	Titlu proiect: AMENAJARE INTERSECTII: Str. Gabor Aron, Str. Varadi Jozsef si Str. Kossuth Lajos, Str. Korosi Csima Sandor	Faza St. Fezab.
Sef proiect	Leitmann Péter				
Proiectat	Leitmann Irén		DATA 05.2014	Titlu plansa: PROFILE TRANSVERSALE TIP	P.Nr. D -02
	Botár István	